


## 700 bar Filling Components

### Presented Object

- ❖ Complete refuelling nozzle assembly consisting of fuelling nozzle type TK17 H2 70 MPa + hose + breakaway coupling

### Characteristics

- ❖ Nominal pressure 700 bar, operating pressure 875 bar, test pressure 1,255 bar
- ❖ Breakaway force 300 – 600 N
- ❖ Temperature range: -40°C up to +85 C
- ❖ Super light nozzle with extremely high flow rate
- ❖ Available with or without data interface

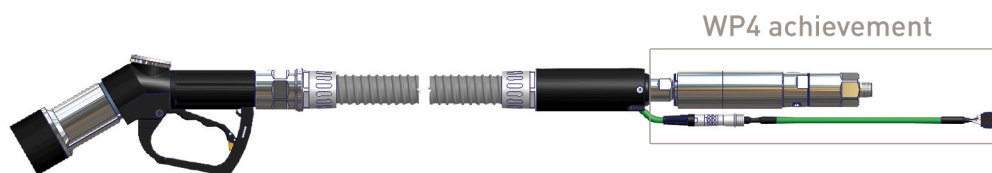

Assembly of refuelling nozzle

### Status & Future Perspectives

- ❖ Commercial product
- ❖ Approvals according to SAE TIR J2799 interface + SAE J2600
- ❖ PED 97/23/EC: CE 0036

### Partners

- ❖ WEH GmbH, Illertissen, DE



### Website

[www.storhy.net](http://www.storhy.net)



The project partners wish to thank the European Commission for financial support of the Integrated Project StorHy– Hydrogen Storage Systems for Automotive Application (Contract No.: SES6-CT-2004-502667) within the 6<sup>th</sup> RTD Framework Programme.